

HAKKO FT-700

TIP POLISHER


Instruction Manual

Thank you for purchasing the HAKKO FT-700 tip polisher.
Please read this manual before operating the HAKKO FT-700.
Keep this manual readily accessible for reference.

1. PACKING LIST AND PART NAMES

Please check to make sure that all items listed below are included in the package.

- HAKKO FT-700 tip polisher.....1
- HAKKO FS-100 paste1



2. SPECIFICATIONS

Name	HAKKO FT-700
Power consumption	4.5 W
External dimensions	70 (W) × 54 (H) × 101 (D) mm
Weight	0.65 kg

NOTE:
Specifications and design are subject to change without notice.

3. WARNINGS, CAUTIONS AND NOTES

⚠ WARNING

Warnings, cautions and notes are placed at critical points in this manual to direct the operator's attention to significant items. They are defined as follows:

⚠ WARNING : Failure to comply with a WARNING may result in serious injury or death.

⚠ CAUTION : Failure to comply with a CAUTION may result in injury to the operator, or damage to the items involved.

NOTE : A NOTE indicates a procedure or point that is important to the process being described.


EXAMPLE : An EXAMPLE is given to demonstrate a particular procedure point or process.

To prevent accidents or damage to the HAKKO FT-700, be sure to observe the following:

⚠ CAUTION

- Do not modify the HAKKO FT-700.
- Use only genuine HAKKO replacement parts.
- Do not wet the unit or use the unit with wet hand.
- Remove power cord by holding the plug – not the wires.
- Take care not to pinch fingers.
- Turn the power off when not in use, or left unattended.
- Turn the power off when changing parts or storing the HAKKO FT-700.
- While using the HAKKO FT-700, don't do anything which may cause bodily harm or physical damage.


4. INITIAL SETUP

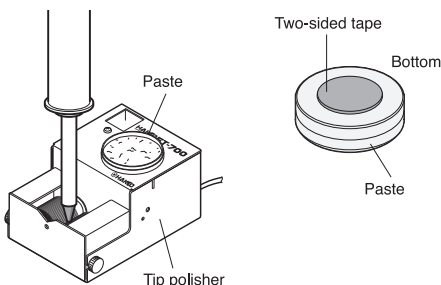


5. OPERATION

- ① Turn on the power switch.
- ② Touch the blackened tip to the polishing brushes to remove the oxide film.

NOTE:
A tip temperature of 300°C (512°F) is the most suitable for cleaning.



- ③ Inspect the tip to see that the oxide film has been removed by the HAKKO FT-700.




- ④ If all of the oxide film has been removed by the HAKKO FT-700, promptly re-tin the tip with the solder wire currently being used. If there is any oxide film remaining, proceed to the next step.



- ⑤ If all of the oxide film could not be removed, touch the tip to the HAKKO FS-100 paste.



- ⑥ Touch the tip to the polishing brushes again to remove any remaining oxide film and any paste residue.



- ⑦ Promptly re-tin the tip with the solder wire currently being used.




NOTE:
Even after being cleaned by the HAKKO FT-700, a tip temperature of 400°C (752°F) or higher will blacken and oxidize the tip quickly unless it is re-tinned promptly after cleaning.

NOTE:
The HAKKO FS-100 has more flux than typical flux cored solder. To prevent flux residue from coming into contact with the P.W.B. after the HAKKO FS-100 is used, touch the tip to the polishing brushes of the HAKKO FT-700 to remove any remaining residue on the tip and re-tin the tip using the solder wire currently being used.

6. PARTS LIST

Item No.	Part No.	Part Name	Specifications
①	B3052	Polishing brush	Set of 2
②	FS100-01	Paste	



中国RoHS 產品中有毒有害物質或元素的名稱及含量

部件名稱	有毒有害物質或元素					
	鉛(Pb)	汞(Hg)	鎘(Cd)	六價鉻 (Cr(VI))	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
馬達	×	○	○	○	○	○
齒輪	×	○	○	○	○	○
終端	×	○	○	○	○	○
插頭	×	○	○	○	○	○

○：表示該有毒有害物質在該部件所有均質材料中的含量均在SJ/T 11363-2006 標準規定的限量要求以下。
 ×：表示該有毒有害物質至少在該部件的某一均質材料中的含量超出SJ/T 11363-2006 標準規定的限量要求。



HAKKO CORPORATION

HEAD OFFICE

4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN

TEL:+81-6-6561-3225 FAX:+81-6-6561-8466

<http://www.hakko.com/> E-mail:sales@hakko.com

AMERICAN HAKKO PRODUCTS, INC.

28920 N. AVENUE WILLIAMS VALENCIA CA 91355, U.S.A.

TEL: (661) 294-0090 FAX: (661) 294-0096

Toll Free (800)88-HAKKO <http://www.hakkousa.com>

4 2 5 5 6